5700 Skylab Road Huntington Beach CA 92647 USA Phone: +1 714-899-8100 Fax: +1 714-899-8179 E-mail: airtech@airtechintl.com Website: www.airtechonline.com

### **Data Sheet**

# **AIRDAM 1**

# Rubber edge damming material

#### DESCRIPTION

Airdam 1 is designed to dam resins in all types of layups. It is a high temperature rubber extrusion that remains firm up to 500 °F (260 °C). Airdam 1 is tacky but will release from metal or non-metal tools, hot or cold. Airdam 1 replaces expensive materials like silicone rubber, cork and the double backed tape required to hold them down. Release films will also seal to Airdam 1.

#### TECHNICAL DATA

Material type Rubber synthetic polymer

Color Yellow


Maximum use temperature 500 °F (260 °C)

Shelf life 18 months from date of manufacture when stored at 72 °F (22 °C).

Do not refrigerate.

#### SIZES

Thickness	Width	Length	Packaging
3/16 inch (4.76 mm)	3/8 inch (9.5 mm)	25 feet (7.60 m)	40 rolls per case

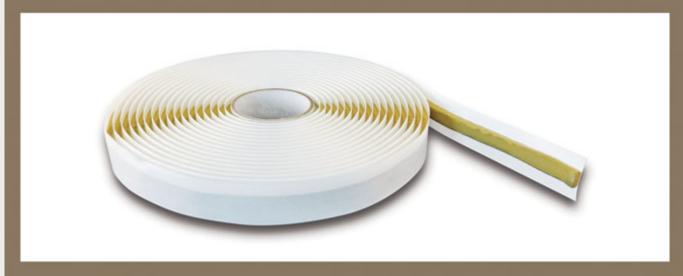

### NOTES

> Teflease MG2 or MG2R PTFE adhesive tape can be used to cover the Airdam 1, making part release easier.

Last updated: 2014-03-06
Catalog position: Miscellaneous