

Data Sheet

GREENFLOW 75

High performance, low profile resin distribution medium

■ DESCRIPTION


Greenflow 75 is designed to efficiently distribute resin with little waste due to the low profile, tight construction. Greenflow 75 can be used with polyester, vinylester and epoxy resins.

■ TECHNICAL DATA

Material type	Polypropylene
Color	Green
Configuration of net	Extruded (Rhombic)
Maximum use temperature	302 °F (150 °C)
Melt point	320 °F (161 °C)
Mesh weight	98 g/m ²

■ SIZES

Thickness	Width	Length
0.03 in (0.9 mm)	41 in (1.04 m)	87.5 ft (26.7 m)
0.03 in (0.9 mm)	41 in (1.04 m)	350 ft (106.7 m)

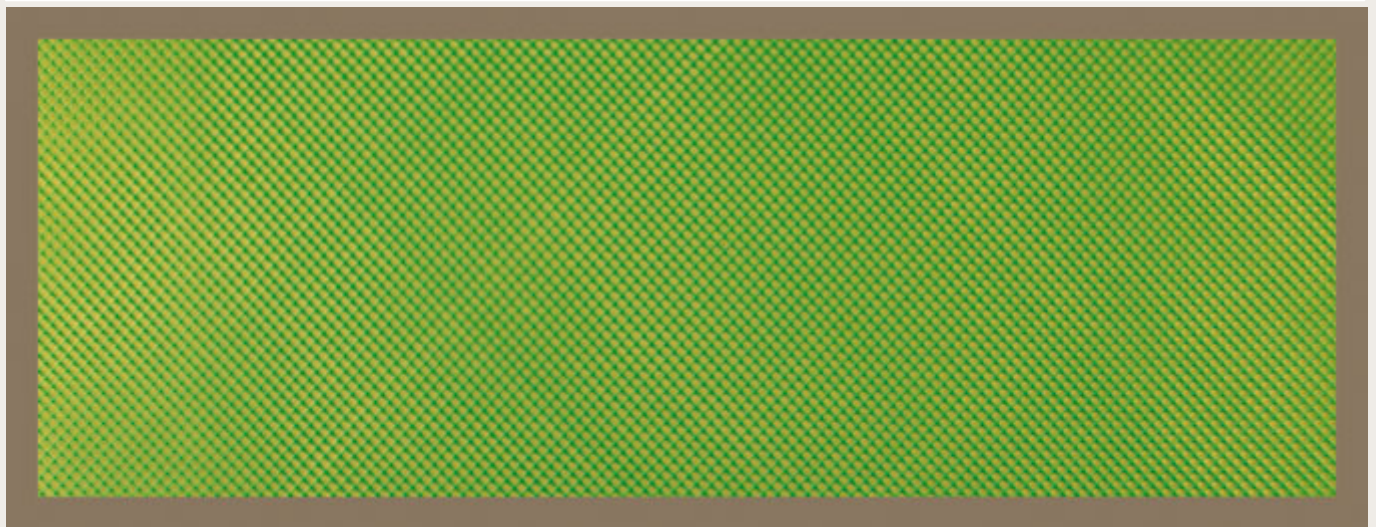

■ NOTES

This product is an extruded mesh and does not fray when cut.

Last updated : 2014-09-11

Catalog position : [Resin infusion products](#)