

Data Sheet

GS-213

Industry standard vacuum bag sealant tape for metal and composite tools

DESCRIPTION

GS-213 is recognized worldwide as the work horse for the composites and bonding industries. It has excellent tack, great clean-up, and is usable up to 400°F (204°C).

BENEFITS


- Excellent tack level, so vacuum bagging is easier and safer.
- Excellent clean up reduces cost of tool cleaning.
- Approved on aerospace specifications worldwide.

TECHNICAL DATA

Color	Off-white
Base material	Synthetic rubber
Maximum use temperature	400°F (204°C)
Shelf life	12 months from date of manufacture
Storage conditions	Tape must be stored flat in original packaging at 72°F (22°C) Do not refrigerate

SIZES

Dimensions	Packaging
1/8 inch x 1/2 inch x 25 feet (3 mm x 12 mm x 7.5 m)	40 rolls per case
1/8 inch x 3/4 inch x 25 feet (3 mm x 19 mm x 7.5 m)	28 rolls per case

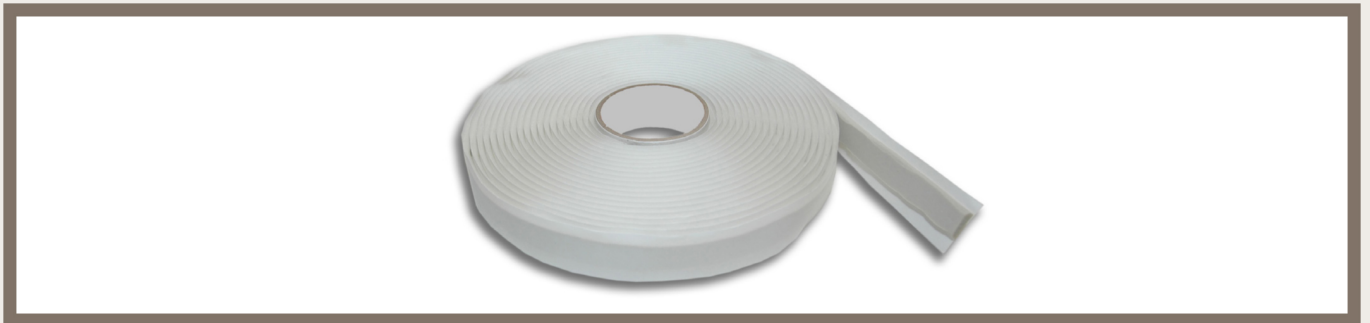

NOTES

- For clean removal, it is recommended to strip the tape from the mold surface once it has cooled down to room temperature.
- The maximum use temperature is dependent upon the duration at maximum temperature and is process specific, Airtech recommends testing prior to use.

Last updated : 2015-08-21

Catalog position : [Vacuum bag sealant tapes](#)