

## Data Sheet

## GS-43MR

### High tack and high temperature sealant tape

#### ■ DESCRIPTION

GS-43MR is our premium sealant tape with excellent tack and easy clean-up. It is usable up to 450°F (232°C).

#### ■ BENEFITS


- Excellent tack level, so vacuum bagging is easier and safer.
- High temperature rating for safer high temperature cures.
- Approved on aerospace specifications worldwide.

#### ■ TECHNICAL DATA

Color	Off-white
Base material	Synthetic rubber
Maximum use temperature	450°F (232°C)
Shelf life	12 months from date of manufacture
Storage conditions	Tape must be stored flat in original packaging at 72°F (22°C) Do not refrigerate

#### ■ SIZES

Dimensions	Packaging
1/8 inch x 1/2 inch x 25 feet (3 mm x 12 mm x 7.5m)	40 rolls per case
1/8 inch x 3/4 inch x 25 feet (3 mm x 19 mm x 7.5 m)	28 rolls per case

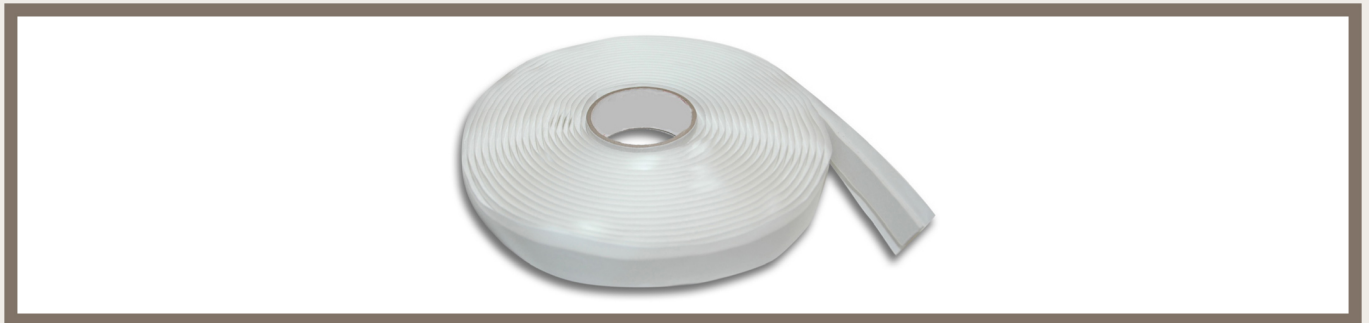

#### ■ NOTES

- For clean removal, it is recommended to strip the tape from the mold surface once it has cooled down to room temperature.
- The maximum use temperature is dependent upon the duration at maximum temperature and is process specific, Airtech recommends testing prior to use.

Last updated : 2015-08-21

Catalog position : [Vacuum bag sealant tapes](#)