

Data Sheet

RESINFLOW 60

Red extruded resin distribution medium

■ DESCRIPTION

Resinflow 60 is designed to assist resin flow through your part during the VARTM (Vacuum Assisted Resin Transfer Molding) process. Our resin distribution medium works well with polyester, vinylester and epoxy resins.


Resin flows more easily throughout your lay-up, when using Resinflow 60.

■ TECHNICAL DATA

| | |
|-------------------------|---|
| Material type | LDPE/ HDPE blend |
| Color | Red |
| Configuration of net | Extruded |
| Maximum use temperature | 212 °F (100 °C) |
| Mesh weight | 4.72 oz/yd ² (160 g/m ²) |

■ SIZES

| Thickness | Width | Length |
|-------------------|----------------|-----------------|
| 0.050 in (1.3 mm) | 60 in (1.52 m) | 350 ft (107 m) |
| 0.050 in (1.3 mm) | 60 in (1.52 m) | 175 ft (53.5 m) |

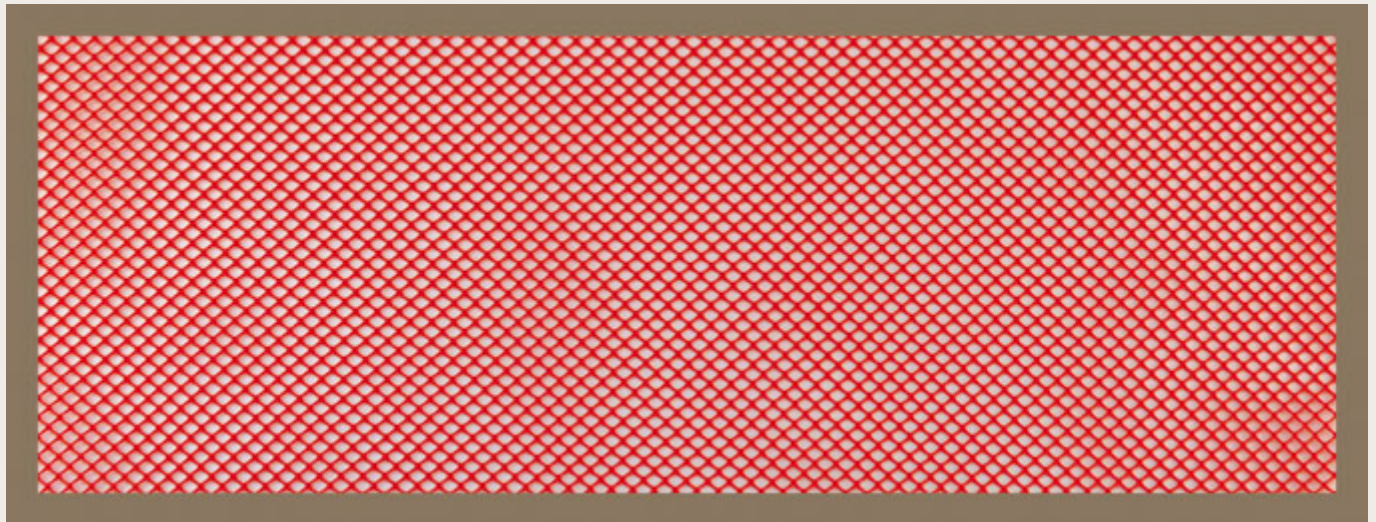

■ NOTES

This product does not fray when cut or roll up at the ends.

Last updated : 2013-08-19

Catalog position : [Resin infusion products](#)